

# 2N3439 2N3440

## SILICON NPN TRANSISTORS


SGS-THOMSON PREFERRED SALESTYPES


NPN TRANSISTOR

#### DESCRIPTION

The 2N3439, 2N3440 are silicon epitaxial planar NPN transistors in jedec TO-39 metal case designed for use in consumer and industrial line-operated applications.

These devices are particularly suited as drivers in high-voltage low current inverters, switching and series regulators.

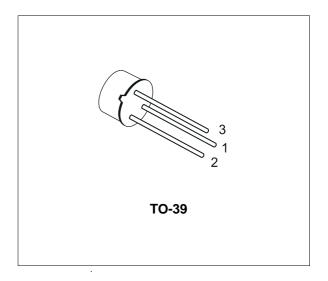

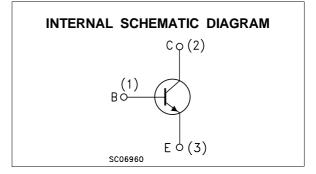

#### **ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Va	Value		
		2N3439	2N3440		
V <sub>CBO</sub>	Collector-Base Voltage (I <sub>E</sub> = 0)	450	300	V	
Vceo	Collector-Emitter Voltage $(I_B = 0)$	350	350 250		
Vebo	Emitter-Base Voltage ( $I_C = 0$ )	7		V	
lc	Collector Current	1		А	
IB	Base Current	0.5		А	
Ptot	Total Dissipation at $T_c \le 25$ °C	10		W	
Ptot	Total Dissipation at $T_{amb} \le 50$ °C	1		W	
T <sub>stg</sub>	Storage Temperature -65 to 200		o 200	°C	
Tj	Max. Operating Junction Temperature	200		°C	

### THERMAL DATA

R <sub>thi-amb</sub> Thermal Resistance Junction-ambient Max 175 °C/V	R <sub>thj-case</sub> R <sub>thi-amb</sub>	Thermal Resistance Junction-case Thermal Resistance Junction-ambient	Max Max		°C/W °C/W
---	---	---	------------	--	--------------

### **ELECTRICAL CHARACTERISTICS** (T<sub>case</sub> = 25 °C unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Ісво	Collector Cut-off Current (I <sub>E</sub> = 0)	for <b>2N3439</b> V <sub>CB</sub> = 360 V for <b>2N3440</b> V <sub>CB</sub> = 250 V			20 20	μΑ μΑ
ICEO	Collector Cut-off Current ( $I_B = 0$ )	for <b>2N3439</b> V <sub>CE</sub> = 300 V for <b>2N3440</b> V <sub>CE</sub> = 200 V			20 50	μΑ μΑ
I <sub>CEX</sub>	Collector Cut-off Current (V <sub>BE</sub> = -1.5V)	for <b>2N3439</b> V <sub>CE</sub> = 450 V for <b>2N3440</b> V <sub>CE</sub> = 300 V			500 500	μΑ μΑ
I <sub>EBO</sub>	Emitter Cut-off Current $(I_C = 0)$	V <sub>EB</sub> = 6 V			20	μA
$V_{CEO(sus)^*}$	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = 50 mA for <b>2N3439</b> for <b>2N3440</b>	350 250			V V
V <sub>CE(sat)</sub> *	Collector-Emitter Saturation Voltage	$I_C = 50 \text{ mA}$ $I_B = 4 \text{ mA}$			0.5	V
V <sub>BE(sat)</sub> *	Base-Emitter Saturation Voltage	$I_{\rm C} = 50 \text{ mA}$ $I_{\rm B} = 4 \text{ mA}$			1.3	V
h <sub>FE</sub> *	DC Current Gain		40 30		160	
h <sub>FE</sub>	Small Signal Current Gain	$I_C = 5 \text{ mA}$ $V_{CE} = 10 \text{ V}$ $f = 1 \text{KHz}$	25			
f⊤	Transition frequency	$I_C = 5 \text{ mA}$ $V_{CE} = 10 \text{ V}$ $f = 5 \text{MHz}$	15			MHz

\* Pulsed: Pulse duration = 300  $\mu s,$  duty cycle 1.5 %



DIM.	mm			inch			
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
А	12.7			0.500			
В			0.49			0.019	
D			6.6			0.260	
E			8.5			0.334	
F			9.4			0.370	
G	5.08			0.200			
Н			1.2			0.047	
I			0.9			0.035	
L	45° (typ.)						



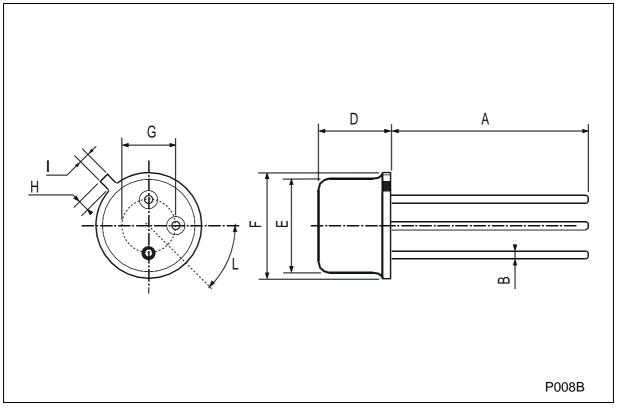

SGS-THOMSON MICROELECTRONICS

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsability for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectonics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A



This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.